accucold

VT65MLBIMED2



33.75" x 23.63" x 23.5" (H x W x D)

Built-in undercounter medical/scientific -25ºC capable all-freezer with front control panel equipped with a digital thermostat and NIST calibrated thermometer/alarm

Highlights:

Specially designed and featured to meet the CDC and VFC's guidelines for safe vaccine storage

User-friendly front control panel keeps the thermostat and alarm in reach without having to open the door

Assembled in the USA from domestic and imported components

Product Features:


Reliable temperature stability	Designed and engineered to store vaccines and other sensitive materials under stable temperature conditions
Slim undercounter dimensions	24" footprint is ideal for use under the counter
Built-in capable	Front-breathing design allows built-in installation under counters
-25º C/-13º F capable	Low temperature operation ideal for vaccines, pharmaceuticals, and other sensitive materials
Digital thermostat	Electronic controls for more precise temperature management, with temperature readout and controls externally located for added convenience
High/low temperature alarm	Audible alarm sounds if the interior temperature rises or falls out of set range
NIST calibrated temperature display	Alarm includes continuous NIST calibrated display of the current interior and high/low temperature, and can be switched from Celsius to Fahrenheit at the touch of a button
Buffered temperature probe	Thermometer probe is encased in a glycol-filled bottle to maintain temperature readings closest to stored contents, as recommended by the CDC and VFC's guidelines
Factory installed lock	Keyed lock conveniently located towards the top of the door for added security (2 keys included)


ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799
info@accucold.com **www.accucold.com**

accucold

VT65MLBIMED2 Specifications:

Overview	
Height of Cabinet	33.75" (86 cm)
Width	23.63" (60 cm)
Depth	23.5" (60 cm)
Depth with Handle	25.5" (65 cm)
Depth with door at 90°	46.0" (117 cm)
Capacity	3.2 cu.ft. (91 L)
Defrost Type	Manual
Door	White
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	1.3
Weight	105.0 lbs. (48 kg)
Shipping Weight	115.0 lbs. (52 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101056531
Freezer	
Door Swing	RHD
Reversible	Factory Reversible
Interior Height	24.25" (62 cm)
Interior Width	17.63" (45 cm)
Interior Depth	17.0" (43 cm)
Thermostat Type	Digital
Fan Type	Exterior
Refrigerant Type	R134a
Refrigerant Amount	2.76 oz.
High Side PSI	235.0
Low Side PSI	88.0
Level Legs	4
Interior Drawers	Yes
Drawers Qty	3
Compressor Step Height	5.5" (14 cm)
Compressor Step Width	17.63" (45 cm)
Compressor Step Depth	5.5" (14 cm)
Temperature Range	-12ºC to -25ºC

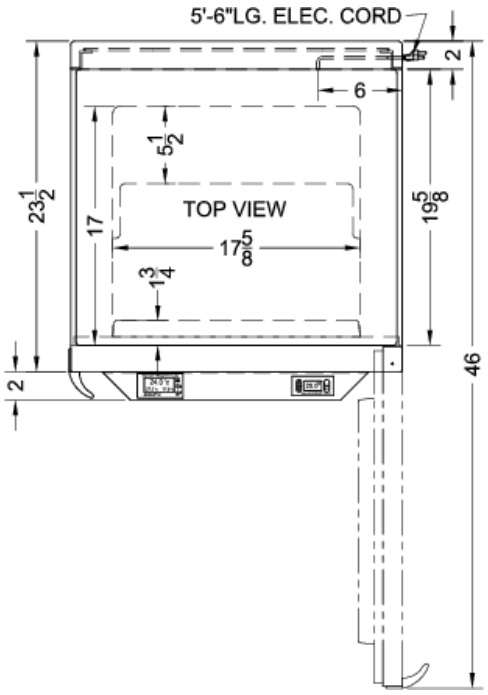

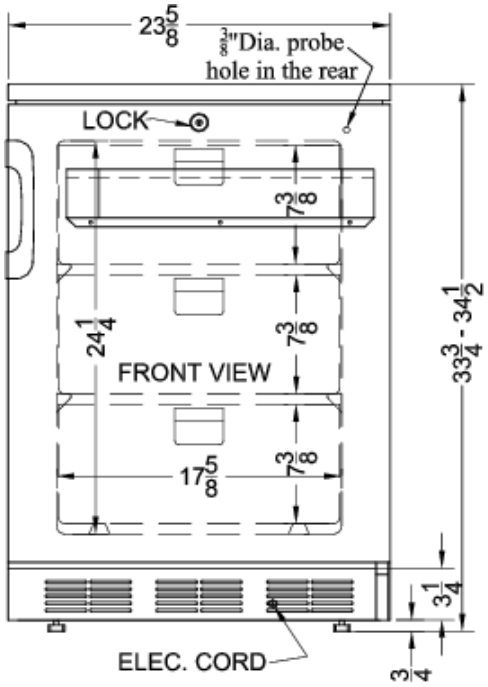

ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799
info@accucold.com **www.accucold.com**